

LINER 350

4-HEAD PRECURED TREAD SANDING MACHINE

Lunghezza max. battistrada	Max. tread length	11000 mm
Larghezza max. battistrada	Max. tread width	380 mm



Utensile: 1 spazzola ϕ 200 mm x L= 400 mm

Sanding tool: 1 steel wire brush ϕ 200 mm x L= 400 mm



matteuzzi srl

Via Serra, 1/E - 3
40012 CALDERARA DI RENO, ITALY
Phone ++39 - 051726351

matteuzzi@matteuzzi-srl.com - www.matteuzzi-srl.com

Due to a policy of continuous improvement, the machine may differ from the images shown


LINER 350

4-HEAD PRECURED TREAD SANDING MACHINE

alimentaz. aria compressa	<i>compressed air supply</i>	8 bar - 120 PSI.
consumo aria compressa	<i>compressed air absorption</i>	200 NI per ciclo - 7.3 cu.ft. per cycle
peso netto	<i>net weight</i>	6200 kg. - 13668 lbs.

DIMENSIONI DELLA MACCHINA IN SERVIZIO

■ DIMENSIONS OF THE MACHINE IN SERVICE

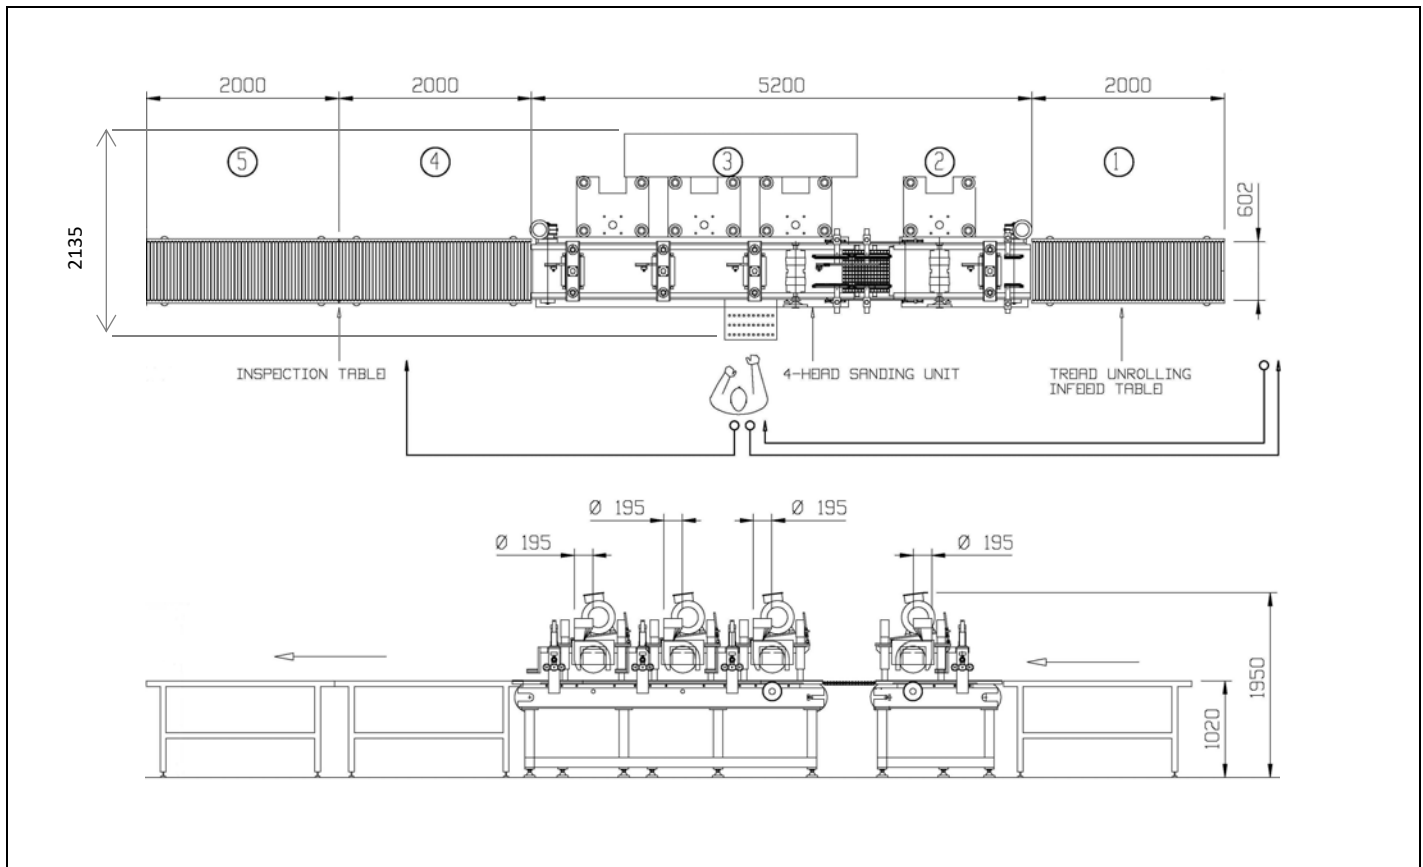

MACCHINE PER PNEUMATICI E PER I PROCESSI DI RICOSTRUZIONE
EQUIPMENT FOR THE TYRE AND RETREADING INDUSTRIES

matteuzzi srl

Via Serra, 1/E - 3

40012 CALDERARA DI RENO, ITALY

Phone ++39 - 051726351

matteuzzi@matteuzzi-srl.com - www.matteuzzi-srl.com